




Gate Automation

Secure motion at the push of a button







SLIDING GATE OPERATORS: ENSURING EFFORTLESS **MOTION** AND EXCELLING IN POWER AND **PERFORMANCE**

Technical Specifications

Voltage	220 VAC
Rated Power	250W
Output Gear Module	M == 4
Output Gear Number	Z == 16
Open Close Speed	V = 12m/min
Rated Speed	1400 RPM
Maximum Pull	1100 N
Maximum Load	Upto 2 ton
Protection Class	IP 55

Applications

-  Home
-  Industries
-  Apartments
-  Hotels
-  Colleges

Features

-  Remote Control
-  Manual Key
-  Safety Operation
-  Shock Proof
-  BLE Control
-  WiFi Control
-  Anti Hit
-  Internet Enabled
-  UPS Feature

SLIDING GATE OPERATORS: CURVING GATE IS NO MORE HASSLE








Technical Specifications

Voltage	220 VAC
Rated Power	250W
Output Gear Module	M == 4
Output Gear Number	Z == 16
Open Close Speed	V = 12m/min
Rated Speed	1400 RPM
Maximum Pull	1100 N
Maximum Load	Upto 2 ton
Protection Class	IP 55



Applications

- 
Home
- 
Industries
- 
Apartments
- 
Hotels
- 
Colleges

Features

- 
Remote Control
- 
Manual Key
- 
Safety Operation
- 
Shock Proof
- 
BLE Control
- 
WiFi Control
- 
Anti Hit
- 
Internet Enabled
- 
UPS Feature



**HAVING TOUGH TIME WITH SPACE CONSTRAINT
WE GOT YOU COVERED**



SWING GATE OPERATORS: ROLLER GATE IS NOW AS EASY THAN ROLLER COASTER

Technical Specifications

Voltage	220 VAC
Rated Power	250W
Output Gear Module	M == 4
Output Gear Number	Z == 16
Open Close Speed	V = 12m/min
Rated Speed	1400 RPM
Maximum Pull	1100 N
Maximum Load	Upto 2 ton
Protection Class	IP 55

Applications



Home



Industries



Apartments



Hotels



Colleges

Features



Remote Control



Manual Key



Safety Operation



Shock Proof



BLE Control



WiFi Control



Anti Hit



Internet Enabled



UPS Feature



LEAVE YOUR WORRIES OF OPENING GATE
SO SMOOTH OPERATION IS GURANTEED

SWING GATE OPERATORS: GET INTO THE SWING OF THINGS

Technical Specifications

Voltage	24V DC 60W
Rotational speed	300 RPM
Arm's Max Travel	300-400 mm
Max Gate Length	2.5 ~ 3 meters
Temperature	-20 deg ~ +50 deg
Gate Open Angle	110 Degree
Input Power	220 VAC
Maximum Load	Upto 2 ton
Protection Class	IP 55

Applications



Home



Industries



Apartments



Hotels



Colleges

Features



Remote Control



Manual Key



Safety Operation



Shock Proof



BLE Control



WiFi Control




Anti Hit



Internet Enabled



UPS Feature

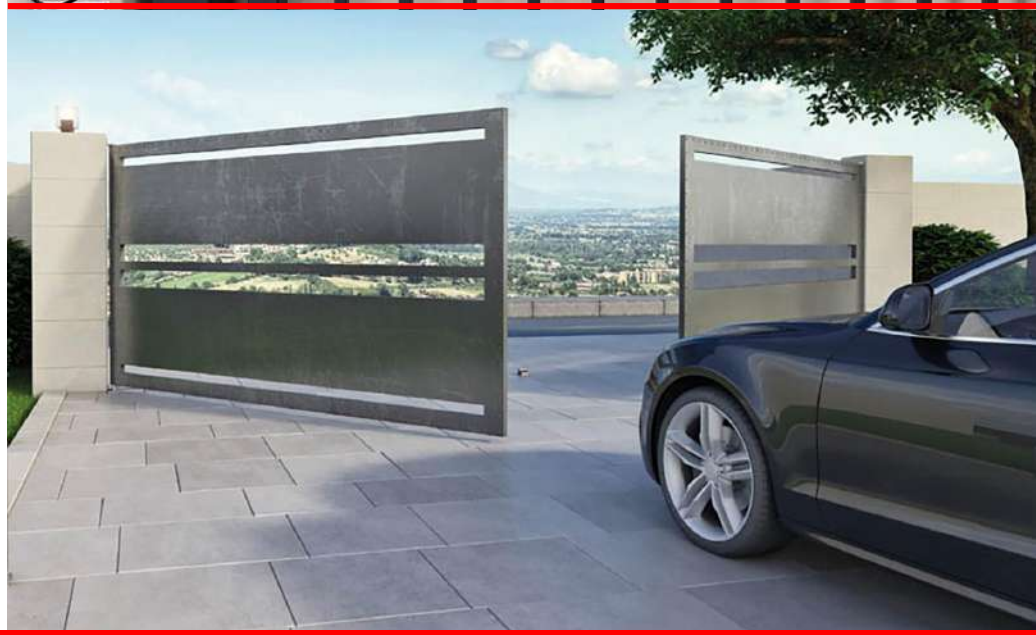



SHUTTER DOOR OPERATORS: SHUTDOWN THE SHUTTER AT YOUR EASE

Technical Specifications

Voltage	220 VAC
Rated Power	240 W
Rated Speed	4.6 RPM
Rated Current	2.8A
Output Torque	168 Nm
Max Height	6m
Cont. Working Time	7 min
Maximum Load	Upto 2 ton
Protection Class	IP 55

Applications



Features



WE GOT YOU COVERED:
EXTRA - WHAT WE ASK
ALWAYS

Optional Integrations



Facial Recognition



Finger Print Scanner



RFID Readers



Password Logger



Safety Devices



GSM Module



IoT Enhancement



QR Code Scanner

Recommended Accessories



Transmitter



Photo Cell



Flash Lamp



Key Switch



Wireless Keypad



WiFi Module



GSM Module



Rack



Wheel



Guide Bracket




End Cap



Sliding Gate Track



Sliding Gate



Swing Gate



Swing Door



Slide Door



Curtain Door



Blinds



Boom Barrier



Rolling Shutter



Garage Door

YOU ARE IN **SAFE HANDS**

Our trained **professionals**
are at **your one call** away



Chennai Office:

Onebee Technology Pvt. Ltd
44A, Sadashivam Nagar,
2nd Street, Madipakkam,
Chennai- 600091
support@onebee.in /
www.onebee.in

Scan Here



Onebee Technology Pvt. Ltd

301/1, Police Kandaswamy Street,
Puliyakulam, Ramanathapuram,
Coimbatore - 641045
support@onebee.in / www.onebee.in

  **91 95008 50000**