


GB 16WRD GLASS BREAK DETECTOR

INTRODUCTION:

- To detect the pane of glass is Shattered or Broken.
- These sensors are commonly used near glass doors or glass store-front windows to detect if an intruder broke the glass and entered.
- It detects the air blast happens unexpectedly and give notifications
- Detection range around 2.5m

SPECIFICATIONS:

1. Communication protocol : 433MHz
2. Connection : Wired
3. Sensitivity : Adjustable
4. It requires Onebee Smart Server

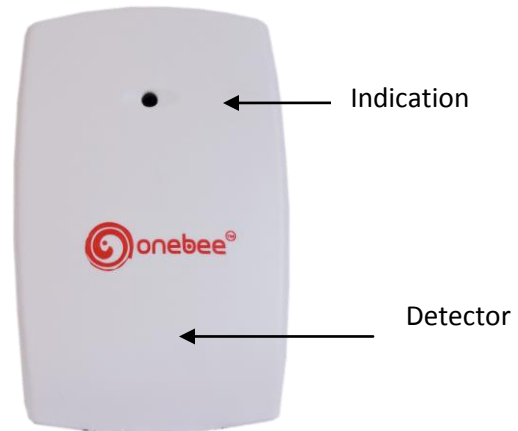

USED IN:

- ✓ Show room Entrance Door
- ✓ Sliding or Swing Doors with Glass
- ✓ Glass windows
- ✓ French Windows

CONNECTION DIAGRAM:

